


TCS 60

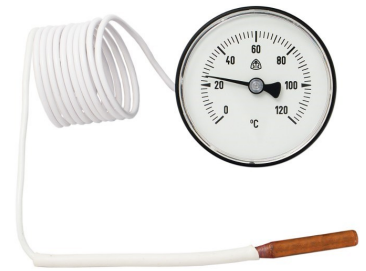

TCS 60 is pressure thermometer intended for temperature measurement in applications where measuring place is different from place of reading. Thermometer consists of a capillary system and head. The thermometer head is constituted of casing and plastic window that protect marker, dial with scale and elastic measuring component.

Description

Thermometer consists of tube in shape of Archimedes' spiral. The inner pressure, that is induced by dilation of the liquid held in the sensor, causes the spiral to uncoil. This rotation movement, that is proportional to the pressure, is transferred to the pointer indicating a measured value at the scale. The sensor and the spiral are connected with a capillary.



Use

Capillary thermometers are intended for temperature measurement in hot water solid-fuel boilers. Thermometers can be used in their measuring range (20-100 °C). Measured temperature must not exceed the upper limit of measuring range. Thermometers can be used in any position. Thermometer head can be installed in environment with maximal temperature 40 °C. Temperature sensor must be placed in liquid or gaseous medium that does not damage copper and its alloys. In other cases, the sensor must be placed in thermometer well. TCS 60 is not intended for use in industry.

Technical data

Measuring range	20-100 °C
Scale range	0-120 °C
Scale division	2 K
Accuracy	±4 % from scale range
Capillary length	1 450 mm
Colour of scale	black
Climatic influences	group B2 parameters +5 °C to +40 °C
Mechanic influences	group NX vibrations - freq. from 10 to 50 Hz, amplitude max. 0,15 mm

Technical drawings

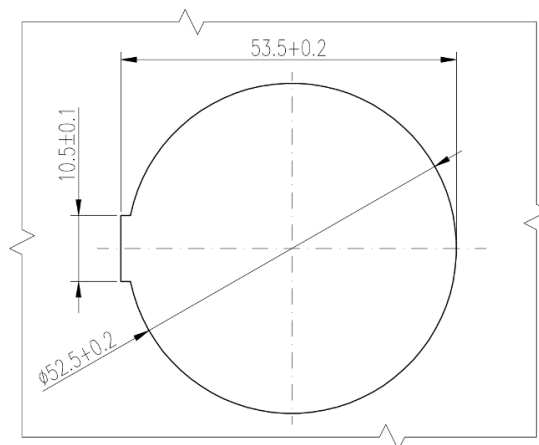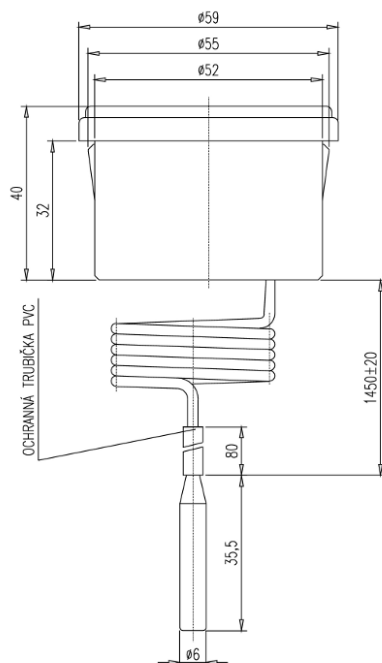

Contacts

APATOR METRA s. r. o.

Havlíčková 919/24

787 01 Šumperk

Czech Republic

Tel.: +420 583 718 261

Fax.: +420 583 718 150

E-mail: prodej@metra-su.cz

WWW: www.metra-su.cz

Your distributor:

The manufacturer reserves the right to change design, technical specifications and accessories without prior notice.